# Popcorn Popper

PRODUCT: QUANTITY: ITEM #:

Models: ☐ PC-1A 120V ☐ PC-1A 240V ☐ MPC-1A 120V ☐ MPC-1A 240V

## Designed Smart

### Designed to Produce Maximum "Popping"

- Kettle system is designed to transfer the optimal amount of heat and agitation. Produces the maximum popcorn "burst" and limits the amount of unpopped kernels.
- "Non-jamming" Agitator motor gently turns to distribute kernels evenly over heated surface.
- Motor and controls located away from heat of kettle in vented top part of cabinet.
- Kettle is made of heavy gauge aluminum for the most efficient heat transfer from thermostatically controlled ring-heater.
- Produces a kettle of popcorn every 2-1/2 minutes.
- PC-1A has a capacity of up to 170 popped one-ounce servings per hour.
- MPC-1A has a capacity of up to 130 popped one-ounce servings per hour.
- "Popped" popcorn stays hot through an efficient system of bottom heat provided by a heating element and top heat provided by a heat bulb.

### Easy to Operate and Maintain

- Kettle heats quickly and has a fast recovery for unexpected surges in Popcorn demand.
- Kettle is designed to require minimal labor:
- Operator can easily access kettle through double rear doors that open wide.
- Magnetic kettle lid opens easily and closes securely, locking in the maximum "popping heat."
- A rotating handle allows the kettle to be single-handedly disengaged for quick, safe and easy emptying.
- Popcorn oil and corn measuring cups provide for accurate, profitable "popping."

## Built Solid

### Built for Long Life!

- Cabinet is constructed of stainless steel and tempered glass for maximum durability.
- Kettle is constructed of aluminum interior pan surrounded by stainless steel and secured to cabinet through double hung stainless steel brackets
- Light bulb illuminates popcorn merchandising system

### Reliability backed by APW Wyott's Warranty

- APW Wyott popcorn equipment is backed by a 1-year parts and labor warranty, and a 1-year on-site labor warranty.
- Certified by the following agencies:

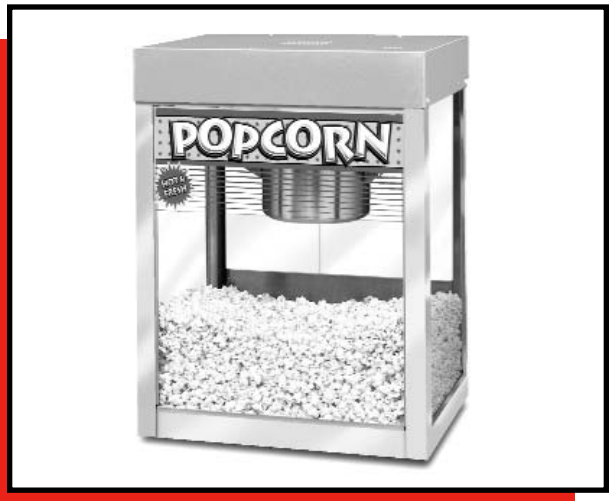


*MPC-1A Popcorn Popper*

## APW Wyott Supporting Products




### Heated Butter Pump

- Available with lighted (LCCW) or regular (CCW)
- 4 quart base

### Heated Butter Pump

- Available with lighted (LW-4)
- 4 quart base
- Comes with inset, hinged cover, and ladle

*See reverse side for product specifications.*

**APW Wyott Foodservice Equipment Company** · 729 Third Ave., Dallas, TX 75226
(800) 527-2100 · (214) 421-7366 · Fax (214) 565-0976 · www.apwwyott.com · info@apwwyott.com

5/22/2005

# Popcorn Popper

Models: ☐ PC-1A 120V ☐ PC-1A 240V ☐ MPC-1A 120V ☐ MPC-1A 240V

PRODUCT: QUANTITY: ITEM #:

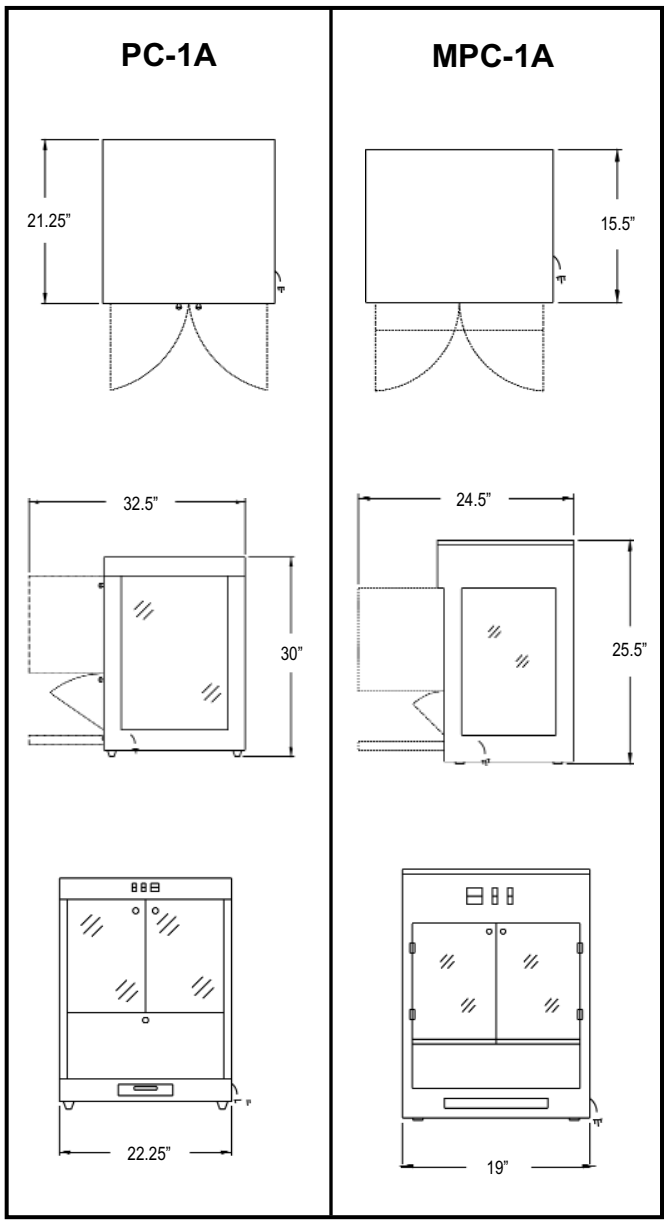


## PRODUCT SPECIFICATIONS

### Construction:

Stainless steel housing, painted steel top; 3/16" tempered glass panels; Lexan® doors and hinges.

### Electrical Information:

The 120V units are equipped with at least 60", three wire grounded power cord which terminates with a standard three-pronged male plug. The MPC-1A 120V unit utilizes a NEMA 5-15P plug, and the PC-1A 120V unit utilize a NEMA 5-20P plug. The 240V units are provided with a 60" power cord with no plug. Plug exits from the back right corner.

### Electrical Specifications:

| | |
|---|---|
| MPC-1A: | 120V, 1125W, 9.4 Amps |
| | 240V, 1125W, 4.7 Amps |
| PC-1A: | 120V, 1643W, 13.7 Amps |
| | 240V, 1643W, 6.8Amps |

### Capacity:

MPC-1A: Up to 130 popped 1 oz. servings per hour.
Kettle holds up to 8 oz.
PC-1A: Can pop up to 170 1 oz. servings per hour.
Kettle hold up to 10 oz.
2-1/2 minute popping cycle for both models.

### Overall Dimensions:

| | |
|---|---|
| MPC-1A: | 25-1/2" H x 19" W x 15-5/8" D |
| | (65 cm x 48 cm x 39 cm) |
| PC-1A: | 30" H x 22-1/4" W x 21-1/4" D |
| | (76.2 cm x 56.5 cm x 54 cm): |

### Shipping:

MPC-1A: 63 lbs. (28.6 kg)
PC-1A: 75 lbs. (34 kg)

Freight Class: 125
FOB: Cheyenne, WY

**APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation.*